

**GLAZER**ITE  
Trusted supply partner

**ALUK**

58BW ST HI Steel  
Casement Windows



Glazerite UK Group Ltd are a leading national trade fabricator of UPVC windows and doors including VEKA, Halo, Deceuninck and Residence.

Now a trusted supply partner of the ALUK range of windows.

**GLAZER**ITE  
Trusted supply partner

39-43 Rixon Court  
Finedon Rd Industrial Estate  
Wellingborough  
Northamptonshire  
NN8 4BA

Tel: (01933) 443222  
Fax: (01933) 443244  
Email: [sales@glazerite.net](mailto:sales@glazerite.net)



## 58BW ST HI STEEL REPLACEMENT WINDOW CONTENT

The look of steel, the benefits of aluminium.

A win-win for designers and homeowners alike. Featuring industry leading build quality, our 58BW ST HI aluminium windows are an ideal replacement for existing steel windows. In addition to impressive high thermal and acoustic performance, the design also replicates the minimal sight lines associated with steel windows, whilst providing superior performance and security. Yet another win-win.

### DESIGN FEATURES


- Certified under the Secured By Design scheme
- Tested to PAS 24
- Green guide rated A
- Integrated deep head profiles for ease of trickle ventilation
- Unique polyamide thermal break design to improve thermal performance

### OPTIONS


- 58mm or 70mm frame depth to accommodate varying types of applications
- Internally or externally glazed
- Glazing 24mm – 32mm
- Available for Lifetime Homes (LFT)
- Available in a range of single or dual colour and anodised finishes
- Available in the following aesthetics: Bay, Heritage and Contemporary
- Available in the following configurations: top hung, bottom hung, side hung, fixed light, multi-light and French casement



### Heritage Transom Detail

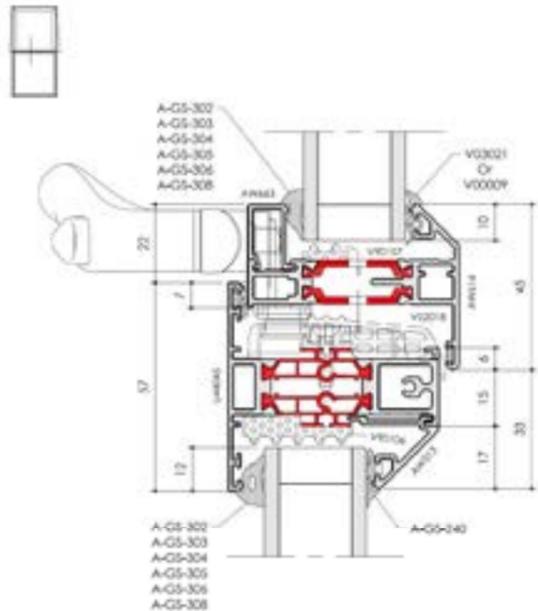

### Cill Detail

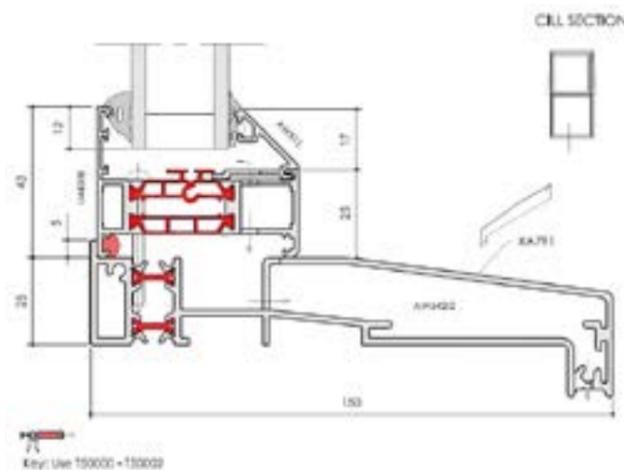

## SPECIFICATIONS

PERFORMANCE & ACCREDITATION	OUTWARD OPENING
• U-value (double glazing)	1.4 W/m <sup>2</sup> K
† U-value (triple glazing)	1.1 W/m <sup>2</sup> K
Green guide rating	A rated
Acoustic performance (dB)	Rw (C,Ctr) 43 (-2;-5) dB
Air tightness (Pa)	Class 4 (600 Pa)
Water tightness (Pa)	Class 9a (600 Pa)
Wind load (Pa)	Class E2400 (2400 Pa)
Security	PAS 24
3rd party certification	Q-mark
Secured by design	Yes

### CONFIGURATIONS

Opening	Open out
Top hung	✓
Side hung	✓
Bottom hung	✓
Fixed light	✓
Multi-light	✓

### SIZE LIMITS

Top hung (max weight)	35 Kg
Side hung (max weight)	24 Kg
Bottom hung (max weight)	60 Kg (3 hinges)
Fixed light (max weight)	250 Kg


### SYSTEM FEATURES

Frame depth	58mm and 70mm
Dual colour option	✓
Multi-point locking	✓
Glazing options	250 Kg
Glazing thickness	24mm - 32mm
Sightline (Frame to Vent)	66mm
Sightline (Vent to Mullion)	81mm
Sightline (Fixed Light)	43mm


### AESTHETICS

Bay	✓
Contemporary	✓
Heritage	✓

### Fixed Jamb Detail

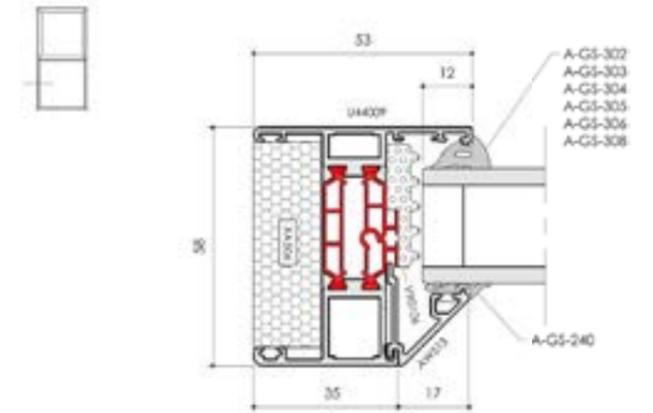

### Deep Frame Detail

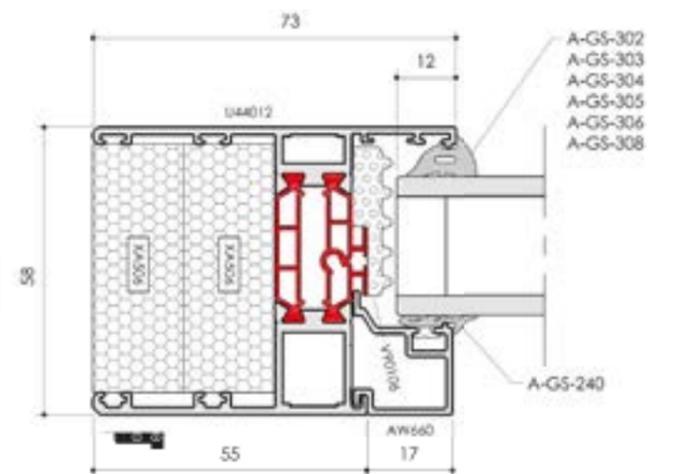

\*Specifications show what can be achieved with the system but not all products will meet them automatically (depending on size, configuration, e.t.c.). Any specific requirements should be discussed with the technical team before ordering. The specifications on this page are subject to change without warning.